



Manufacturer of RFID tags

DATASHEET

Laundry Tag

Tag Code: H092209

Laundry tags are robust and durable tags developed especially for laundry & linen management. These tags are designed to withstand conditions of pressure, heat, and chemical resistance as per requirements of the applications. These tags facilitate contactless tracking and inventory management of garments in textile rental & industrial Laundry verticals.



Electrical Specification

Air Interface Protocol	ISO/IEC 15693
Operational Frequency	13.56 MHz
Chip**	NXP I-Code SLIX-L
	512 bits, organized in 16 blocks of 4 bytes each, 4 blocks are summed up to 1 page
Data retention	50 years
Write endurance	100,000 cycles


Physical / Mechanical Specification

Product Name	Laundry tag with hole	Laundry tag without hole
Diameter	16 mm	16 mm
Thickness	3.2 mm	3.3 mm
Hole Diameter	1.85 mm	N/A
Weight	1 gm	0.9 gm
Encasement	PPS	
Quality Assurance	100% reader tested	
Color	White/Black	

Environmental Resistance

Operating temperature	-40°C to +150°C , 180°C for short duration
Storage temperature	-40°C to +80°C
Ingress protection rating	IP68
Applicable surface	Fabric
Expected Lifetime	Years in normal operating conditions

Dimensions

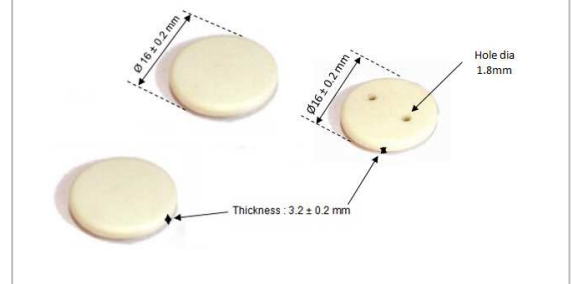

Chemical Resistance

Resistant to continuous exposure to salt water for 2 hours

Resistant to continuous exposure to motor oil for 2 hours

Additionally, abrasion resistant against HCL and IPA

Additional Services

Pre-encoding	On request
Customization***	Logo / text printing on request

* Actual Read range may vary depending upon the reader and environmental factor

** Other on request

*** Available as an option at extra cost

Order Information

Part No.	Description
H092209	With NXP I-Code SLIX-L
H092107	With NXP I-Code SLI
H092231	With SIC 5600

Omnia Technologies Pvt. Ltd.

Corporate Office
691, Udyog Vihar Phase V, Gurugram, Haryana-122016, India, +91(124) 4203899, 4101506

Manufacturing Unit
Plot No. 68, Sector- 5, IMT Manesar, Gurugram, Haryana - 122050, INDIA | +91(124) 4366174, 4366411, +91 (124) 4366410 (Fax)