



Manufacturer of RFID tags

DATASHEET

UHF Innova Tag

Tag Code: U0412911

Innova Tag is a UHF Gen2 long range passive tag. It is ideal for deployment in rugged and harsh environments and it gives excellent performance on metallic objects & plastic.



Electrical Specification

Air Interface Protocol	ISO/IEC 18000-6C, EPC Global C1G2
Operational Frequency	865 – 868 MHz or 902 – 928 MHz
Chip	Alien Higgs-3
Memory Configuration	EPC-96 bits, extendible to 480bits
	TID – 96 bits unalterable unique
	User memory – 512 bits
	Access password – 32 bits
Kill password – 32 bits	
Read Range*	On metal – Up to 15 m Off metal – Up to 8 m


Physical / Mechanical Specification

Dimensions	150 x 23 x 18 ± 0.2 mm
Hole Dia	5.0mm
Colour**	Grey
Weight	35 g
Encasement	PC / ABS High Impact
Quality Assurance	100% reader tested

Environmental Resistance

Operating temperature	-40°C to +85°C
Storage temperature	-40°C to +85°C
Ingress protection rating	IP67
Attachment***	Riveting/Screws/Magnetic/Adhesive
Applicable surface	Metal

Dimensions

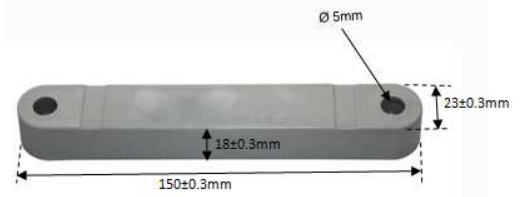

Chemical Resistance

Resistant to continuous exposure to salt water for 2 hours

Resistant to continuous exposure to motor oil for 2 hours


Additionally, abrasion resistant against HCL and IPA

Additional Services

Pre-encoding	On request
Customization***	Logo / text printing on request


Radiation Pattern Graph

(Orientation v/s Read Range)

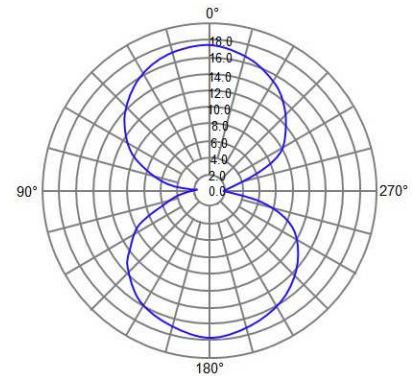

Linear Frequency Graph

(Frequency v/s Read Range)

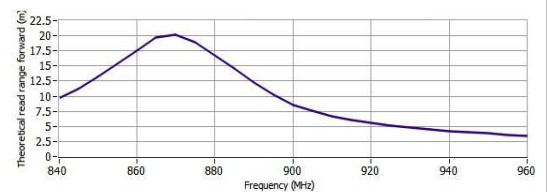

* Actual Read range may vary depending upon the reader and environmental factor

** Other on request

*** Available as an option at extra cost

Order Information

Part No.	Description
U0412911-EU	Alien higgs-3 chip tuned at ETSI frequency
U0412911-US	Alien higgs-3 chip tuned at US frequency

Omnia Technologies Pvt. Ltd.

Corporate Office

691, Udyog Vihar Phase V, Gurugram, Haryana-122016, India, +91(124) 4203899, 4101506

Manufacturing Unit

Plot No. 68, Sector- 5, IMT Manesar, Gurugram, Haryana - 122050, INDIA | +91(124) 4366174, 4366411, +91 (124) 4366410 (Fax)