


HF Micro Tag

Product Code: H342209

Micro tag is miniature off-metal tag which provides unparalleled performance for its size. It offers new possibilities for companies to improve their asset management especially for computers and other devices that contain valuable information.



Tag Dimensions

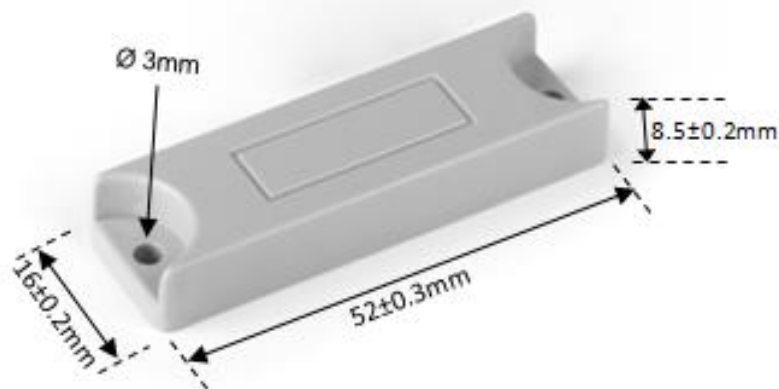

Electrical Specifications

Air Interface Protocol	ISO/IEC 15693
Operational Frequency	13.56 MHz
Chip**	NXP I-CODE SLIX-L
	512 bits, organized in 16 blocks of 4 bytes each, 4 blocks are summed up to 1 page
	Fast data transfer: up to 53 Kbit/s
Data retention	50 years
Write endurance	100000 cycles
Read Range*	Up to 50 mm on GIS TS-HR 38 Reader
Operating temperature	-40°C to +85°C
Storage temperature	-40°C to +85°C
Ingress protection rating	IP67
Attachment***	Riveting /screw/Adhesive
Applicable surface	Plastic, Wooden
Expected Lifetime	Up to 5 Year in normal operating conditions

Physical and Mechanical Specification

Dimension	52±0.3 x 16±0.2 x 8.5±0.2 mm
Weight	8 g
Colour**	Grey
Encasement	ABS/PC
Quality Assurance	100% Read Tested

Chemical Resistance

Resistant to continuous exposure to salt water for 2 hours

Resistant to continuous exposure to motor oil for 2 hours

Additionally, abrasion resistant against HCL and IPA

Additional Services

Pre-encoding	On request
Customization***	Logo / text printing on request

Order Information

H342158	With NXP Mifare UL chip
H342209	With NXP I-CODE SLIX-L
H342107	With NXP I-CODE SLI
H342098	With NXP Mifare 1K
H342231	With SIC 5600

- * Actual read range may vary depending upon the reader
- ** Other on request
- *** Available as an option at extra cost

Omnia Technologies Pvt. Ltd.

Corporate Office

Plot No. 145, Udyog Vihar Phase 1, Gurugram, Haryana-122016, INDIA

Manufacturing Unit

Plot No. 68, Sector-5, IMT Manesar, Gurugram, Haryana-122050, INDIA | +91(124)4366174, 4366411,+91(124)4366410 (Fax)
