


LF Micro Tag

Product Code: L342131

Micro Tag is a miniature on-metal tag which provides unparalleled performance for its size. It offers new possibilities for companies to improve their asset Management especially for computers and other devices that contain valuable information.



Tag Dimensions

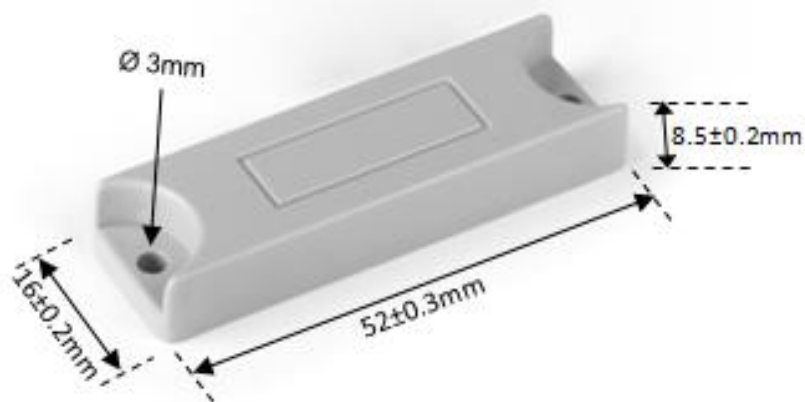

Electrical Specifications

Air Interface Protocol	ISO/IEC 11784/85
Operational Frequency**	125kHz (134.2kHz on request)
Chip**	EM4305
	512-bit EEPROM organized in 16 words of 32 bit
	<ul style="list-style-type: none">❖ 32-bit unique identifier (UID)❖ 32-bit Password read and write protection❖ Lock feature converts EEPROM words into Read Only❖ Two data encodings: Manchester and Bi phase❖ Multi-purpose data rate: 8, 16, 32, 40 and 64 RF clocks
Read Range*	Up to 80 mm on GIS TS-RW 38 Plus Reader
Operating temperature	-40°C to +80°C
Storage temperature	-40°C to +120°C
Ingress protection rating	IP67
Attachment***	Riveting Screws / Adhesive
Applicable surface	Metal, Plastic
Expected Lifetime	Up to 5 Years in normal Operating condition

Physical and Mechanical Specification

Diameter	52 x 16 x 8.5mm
Weight	5.0 gm
Encasement	ABS/PC
Quality Assurance**	100% reader tested
Colour	Grey/Black

Chemical Resistance

Resistant to continuous exposure to salt water for 2 hours

Resistant to continuous exposure to motor oil for 2 hours

Additionally, abrasion resistant against HCL and IPA

Additional Services

Pre-encoding	On request
Customization***	Logo / text printing on request

Order Information

L34224A	With SIC 7999 HDX
L342171	With EM 4200
L342055	With HitagS 256

- * Actual read range may vary depending upon the reader
- ** Other on request
- *** Available as an option at extra cost

Omnia Technologies Pvt. Ltd.

Corporate Office

Plot No. 145, Udyog Vihar Phase 1, Gurugram, Haryana-122016, INDIA

Manufacturing Unit

Plot No. 68, Sector-5, IMT Manesar, Gurugram, Haryana-122050, INDIA | +91(124)4366174, 4366411,+91(124)4366410 (Fax)
