


## **HF Metallica Tag**

**Product Code: H191158** 

Metallica tag is on-metal tag which provides unparallel performance for its size. It offers new possibilities for companies to improve their asset management especially for computers and other devices that contain valuable information.



## **Tag Dimensions**

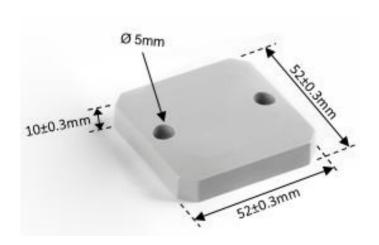

| Electrical Specifications     |  |  |
|-------------------------------|--|--|
|                               |  |  |
| Air Interface Protocol        | ISO/IEC 14443 Type A                             |  |
| Operational Frequency         | 13.56 MHz  |  |
| Chip**                        | NXP MIFARE Ultralight                            |  |
|                               | 512-bit, organised in 16 pages, 4 bytes per page |  |
|                               | 384-bit user read/write area 12 (Pages)          |  |
|                               | Data transfer of 106 Kbit/s                      |  |
| Data Retention                | 5 years  |  |
| Write endurance               | 10,000 cycles                                    |  |
| Read Range*                   | Up to 35 mm on GiS TS-HRW 380 Reader             |  |
| Operating temperature         | -40°C to +80°C                                   |  |
| Storage temperature           | -40°C to +80°C                                   |  |
| Ingress protection rating     | IP67   |  |
| Attachment***                 | Riveting/Screw/Adhesive                          |  |
| Applicable surface            | Metal/Plastic                                    |  |
| Expected Lifetime             | Up to 5 Year in normal operating conditions      |  |
| <b>Physical and Mech</b>      | nanical Specification                            |  |
| Dimensions                    | 52 x 52 x 10 ± 0.3 mm                            |  |
| Hole Dia                      | Ø 5.0 ± 0.2 mm                                   |  |
| Colour**                      | Grey/Black                                       |  |
| Weight                        | 25 g   |  |
| Encasement                    | PC / ABS high Impact                             |  |
| Quality Assurance             | 100% reader tested                               |  |
| Dimensions                    | 52 x 52 x 10 ± 0.3 mm                            |  |
| <b>Chemical Resistan</b>      | <u>ice</u>                                       |  |
| Resistant to continuous exp   | oosure to salt water for 2 hours                 |  |
| Resistant to continuous exp   | osure to motor oil for 2 hours                   |  |
| Additionally, abrasion resist | tant against HCL and IPA                         |  |

## **Additional Services**

| Pre-encoding     | On request                      |
|------------------|---------------------------------|
| Customization*** | Logo / text printing on request |

## **Order Information**

| H090209 | With NXP I-Code SLIX-L |
|---------|------------------------|
| H090107 | With NXP I-Code SLI    |
| H090231 | With SIC 5600          |

Actual read range may vary depending upon the reader

\*\* Other on request

\*\*\* | Available as an option at extra cost

Omnia Technologies Pvt. Ltd.

Plot No. 68, Sector-5, IMT Manesar, Gurugram, Haryana-122050, INDIA

Email: sales@omniatags.com